

## XI. Maintenance and Storage

- \* Please remove the power plug from the electric outlet after use or before moving, servicing or adjusting the product.
- \* Cool it well and put it in the box when it is not in use.
- \* Please use it indoors, and protect it against direct sun exposure or rain.
- \* Please store it in a dry and ventilated place.

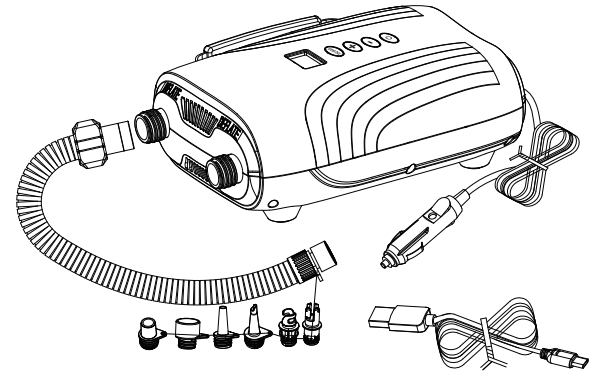
## XII. Suggestion

- \* The warranty period of this product is one year. It is recommended to use original parts; otherwise, any failure thereof will not be covered by the warranty.



## SUP ELECTRIC AIR PUMP HT-769Plus Operation Instructions

Please charge the battery at least every 6 months to ensure good battery performance.




Please read the operation instructions carefully before using this product.  
Please operate in the correct way based on complete understanding.

## Catalogue


I. Warnings	1
II. Product Introduction	1
III. Product parameters	2
IV. List of Accessories	2
V. Details of Accessories	2
VI. Inflation Operation	3
VII. Deflation operation	3-4
VIII. Precautions	4
IX. Charging	5
X. Fault Handling	5
XI. Maintenance and Storage	6
XII. Suggestions	6

### IX. Charging

- ★ Please use the Type-C USB cable supplied with this product to charge (When charging, the blue light blinks and the red light is long, indicating that it is in the fast charging state). Please make sure to use a 5V USB interface for charging.
- ★ When only one indicator is on, it is recommended to charge the product in time. The indicators will flash during charging, and all the indicators will be on when the product is fully charged.
- ★ Make sure the battery is fully discharged before the first charge. After the battery is discharged, the internal temperature is too high. It is recommended to cool it down before charging it. Do not let the electric air pump in a state of no electricity for a long time.



### X. Fault Handling





Fault	Inspection	Solution
The air pump cannot be started normally.	<ol style="list-style-type: none"> <li>1. Check if the switch “” is turned on and the battery is fully charged.</li> <li>2. Overheating or overload causes motor stop.</li> </ol>	<ol style="list-style-type: none"> <li>1. Turn on the power switch and charge it in time.</li> <li>2. Cool the motor and restart it.</li> <li>3. If the problem cannot be solved, please contact local agents or the similar authorized personnel.</li> </ol>
Slow or abnormal inflation.	<ol style="list-style-type: none"> <li>1. Check whether the hose is blocked or cracked.</li> <li>2. The joint between the hose and air pump or air bag is not installed properly.</li> </ol>	<ol style="list-style-type: none"> <li>1. Change the hose or make it unblocked, and check whether the hose is cracked.</li> <li>2. Reinstall the hose.</li> <li>3. If the problem cannot be solved, please contact with the manufacturer or its service agent or the similar authorized personnel.</li> </ol>
E2	Forced shutdown when product detects that temperature reaches 100 °C.	Heat dissipation is required.
E3	Shutdown protection without increasing air pressure.	Check for air leaks.
Air pressure does not return to zero.	Remove the connecting trachea.	Press and hold the pressure unit toggle button for more than 3 seconds to return to zero.

### III. Product parameters

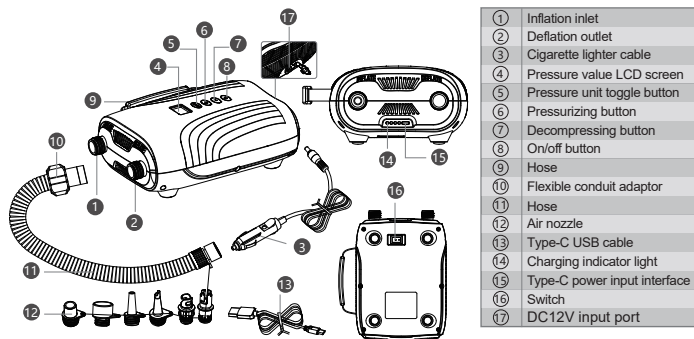
Pressure	0-20PSI	Noise	≤85dB
Airflow	Low: 350 L/min/ High: 70 L/min	Charging input	USB 5 V/1 A、 5 V/2 A or 12 V/1.5 A
Battery	4000mAh		
Power	110 W	Charging time	5V/2A About 6 hours 12V/1.5A About 3 hours
Input voltage	DC12-14.4V		

### IV. List of Accessories












Please make sure that the following accessories are in the box before using it, if any missing, please contact with the local agents or distributors.





Air pump	Hose	Type-C USB cable Cigarette lighter cable	Instruction Book
			

### V. Details of Accessories






### VI. Inflation Operation




- ★ Connect the end with flexible conduit adaptor of the hose with the air pump inflation inlet and twist clockwise to tighten it, as Fig 1.
- ★ Install the other end of the hose into the supporting air tap of the air bag as Fig 2, and twist clockwise to tighten it, and then insert the inflation valve of the air bag and twist clockwise to fix it ( Fig 2).
- ★ Turn on the power switch.  ( the symbol “-” on the switch means “ON”, “O” means “OFF” ) Gently press switch button  to start inflation or plug one end of the cigarette lighter cable into the product input interface (Fig 3) and insert the other end into the 12V DC socket (Fig 4), the display light up, short press the On/Off button  to start inflating.
- ★ Press the pressure unit toggle button  to select the until you need.
- ★ Press the pressurizing button  or decompressing button  to set the pressure value you need, with the range of the pressure value from 0 to 20PSI, (1PSI=0.0689BAR=6.89KPA) .
- ★ After finishing the above steps,press the power switch button  to start to inflate.
- ★ During the inflating process, you can press the pressurizing button  or decompressing button  to increase or reduce the pressure value, press the pressure unit toggle button  to switch the unit, and press the On/Off button  to stop.
- ★ Press and hold the On/Off button for 3 seconds to directly start the high pressure pump. When the pressure reaches the set value, the air pump will stop working automatically.
- ★ After pulling out the DC plug, please take down the hose from the air pump air bag and store it.
- ★ Notice:The factory set pressure value of the air pump is 20PSI (1PSI =0.0689BAR=6.89KPA), and at the time of the secondary use ,the set pressure value for the last time use will be displayed by default.

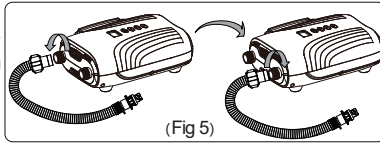


### VII. Deflation operation



- ★ Remove the hose from the inflation inlet, Connect the end with flexible conduit adaptor of the hose with the air pump deflation outlet, and twist clockwise to tighten it (Fig 3) and the other end shall still be to the airbag.

- \* In the standby status, press the On/Off button  open to start deflation, or plug one end of the cigarette lighter cable into the product input interface (Fig 3) and insert the other end into the 12V DC socket (Fig 4), the display light up, short press the On/Off button  to start deflation, until all the gas is discharged and then press the On/Off button  for 3 seconds to stop working, until all the gas is discharged, then the power can be turned off to stop the deflation.

- \* When not in use, turn off the power switch , remove the hose from the air pump and air bag and store the product properly. (the symbol “” on the switch means “ON”, “” means “OFF”).



### VIII. Precautions

- \* The product Type-C USB of 5V 1A, 5V 2A or fast charge 12V 1.5A for charging and product shall not be started during charging.
- \* Do not block the inflation inlet and deflation outlet and ensure that the inflation inlet and deflation outlet shall remain smooth at all time.
- \* Observe the local waste treatment provisions and it is not allowed to throw the air pump away randomly.
- \* Don't use this product when the hose is damaged, and please change the hose immediately.
- \* Don't pull out the hose when inflating, because that the high pressure may hurt the physical body.
- \* Don't make the air pump work for more than 20 minutes, because that motor overheating may cause internal damaged and the air pump shall be fully cooled for 30 minutes after continuously working up to 20 minutes.
- \* Please don't use this air pump if any part is damaged and please contact with the professional personnel to repair it.
- \* In order to prevent risk, the inflation inlet shall not be forward to face or body.
- \* Please don't leave while inflating.
- \*  Disposal: Do not dispose of this product as unsorted municipal waste.  The waste must be collected separately for special disposal.
- \* This product shall not be disposed of with household waste and must be disposed of in an approved location for recycling electrical and electronic products.
- \* By collecting and recycling waste, you can help conserve natural resources and ensure that product is treated in an environmentally friendly and healthy way.
- \* The built-in batteries of this product must be removed from the equipment and disposed of properly before being scrapped.
- \* Please charge the battery at least every 6 months to ensure good battery performance.
- \* Please start the car when using the product, in case of unnecessary damage.

## SUP ELECTRIC AIR PUMP

### I. Warnings



- \* **Warning:** This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- \* **Warning:** Children shall be kept far away from this product and wire.
- \* **Warning:** This product shall not be exposed to the rain or immersed in water.
- \* **Warning:** Before moving, maintaining, repairing or adjusting this product, please first pull out the cigarette lighter plug from the socket.
- \* **Warning:** Please do not bury the wire in the soil, and it shall be place in the safe zone where it won't be damaged by mower or other equipment.
- \* **Warning:** If the power wire is damaged, the power wire must be changed by the manufacturer or its service agent or the similar authorized personnel, in case of any risk.
- \* **Warning:** If you are standing in a place with water or your hands are wet, please don't plug or pull the cigarette lighter plug.
- \* **Warning:** Before inflating, please pay attention to check the maximum bearable pressure of the inflatable product, because the air bag may be damaged upon exceeding the maximum bearable pressure.
- \* **Warning:** Before using, please check the cigarette lighter socket to make sure that there is no rust or residue inside. The cigarette lighter socket with poor electric conduction may cause overheating of the product or power source, which will damage the product.
- \* **Warning:** The purpose of using this product is limited to the description in the instruction book.
- \* **Warning:** The product cannot be used under flammable and explosive environment.
- \* **Warning:** Please use this equipment at ambient temperature of no more than 40 degrees.
- \* **Warning:** The pressure line of the product is only suitable for the original wave pipe.
- \* **Warning:** Be sure to check if the wave pipe is broken, and make sure the switch, the cigarette lighter and the pressure screen really work prior to use.
- \* **Warning:** Keep away from heat source, humidity, dust and direct sunlight.
- \* **Warning:** Do not throw this product into fire for fear of explosion, battery leakage or other dangers.

### II. Product Introduction

HT-769Plus is an intelligent power storage air pump with preset pressure value and It can inflate inflatable tents, inflatable beds, canoeing, etc. In addition, it has an intelligent pressure system. That is to say, air pump will automatically stop inflation when pressure reaches the preset pressure value. This product also can deflate and when the inflatable product is not used, you can use the air pump to empty the air inside for folding and storage.